



PAIRUI

FUAN

Ferrite Cores

T4*2*2


P3 - T4*2*2 - C/P

P3 : Material .
 T4*2*2 : Core Size.
 C/P : Coating.
 C=Epoxy;P=Parylene.



Dimension: (UNIT:mm)

	Dimensions (mm)	Epoxy Coating Dimensions(mm)
OD	4.0 ± 0.20	4.00±0.20
ID	2.0 ± 0.20	2.00±0.20
HT	2.0 ± 0.20	2.00±0.20

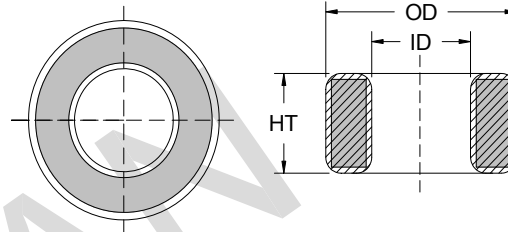

Effective parameter

Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g/set)
9.42	2.00	18.85	≈ 0.09


Test conditions

AL: F=10.0KHz U=0.1V N=10Ts (HP-4284A) .
 Coating The core are coated with epoxy, flame retardant in accordance with "UL 94V-0"file number E228348. The colour is green.


Ring core data

AL(nH)	μi	Type Number
613 ± 25%	2300	T4*2*2 - P3
1333 ± 30%	5000	T4*2*2 - H5K
1867 ± 30%	7000	T4*2*2 - H7K
2667 ± 30%	10000	T4*2*2 - H10K


Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

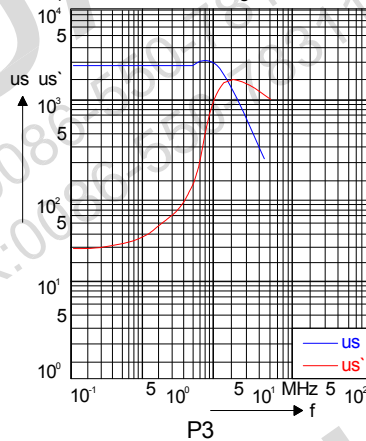


Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

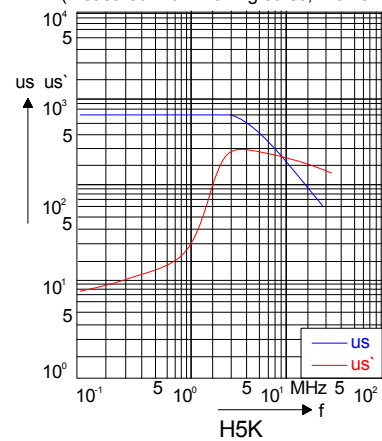

Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

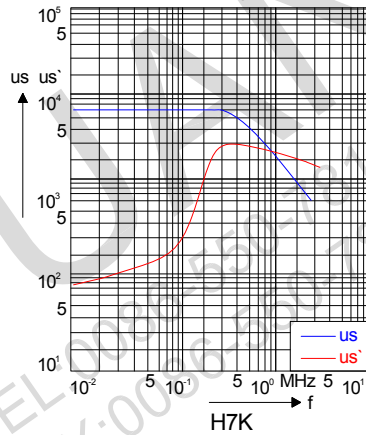

Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

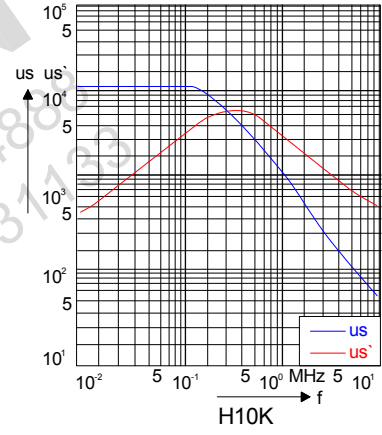

Note:

- 1:Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2:ROHS compliant.