



KT: Toroidal Cores.
106 : Core Size.
52 : Material.

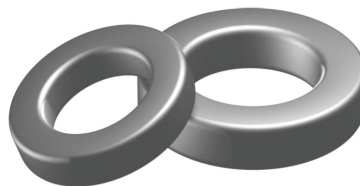

Dimension: (UNIT:mm)

	Tolerance includes coating
OD	26.90 ± 0.75
ID	14.50 ± 0.75
HT	11.10 ± 0.88

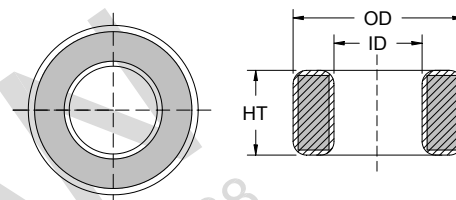

Effective parameter

Le(cm)	Ae(cm ²)	Ve(cm ³)	Wt(g/set)
6.490	0.659	4.280	≈ 31.03

Test conditions


AL: F=1.0KHz U=0.3V N=10Ts (HP-4284A).

Coating The core are coated with epoxy,
flame retardant in accordance


with "UL 94V-0" file number E228348.

Ring core data

AL(nH)	μ _e	Type Number	Color Code
95.0 ± 10%	75	KT-106-52	Green/Blue

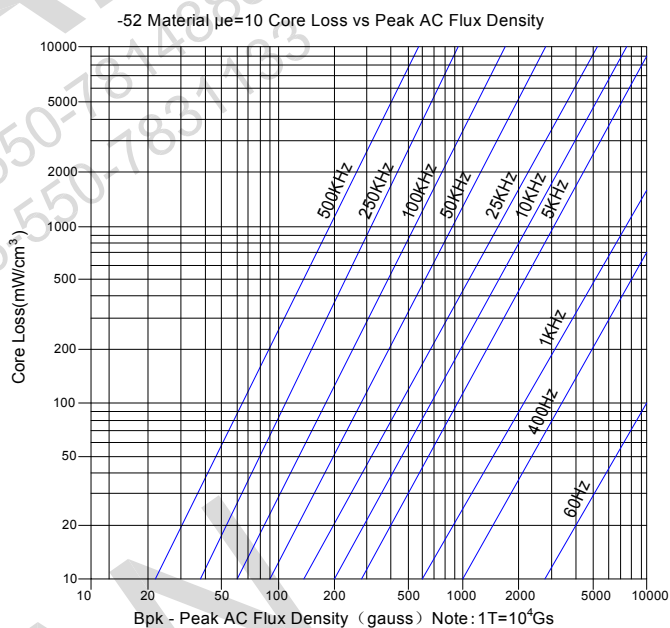

-52 Percent Initial Permeability (%μ_i) VS DC Magnetizing Force

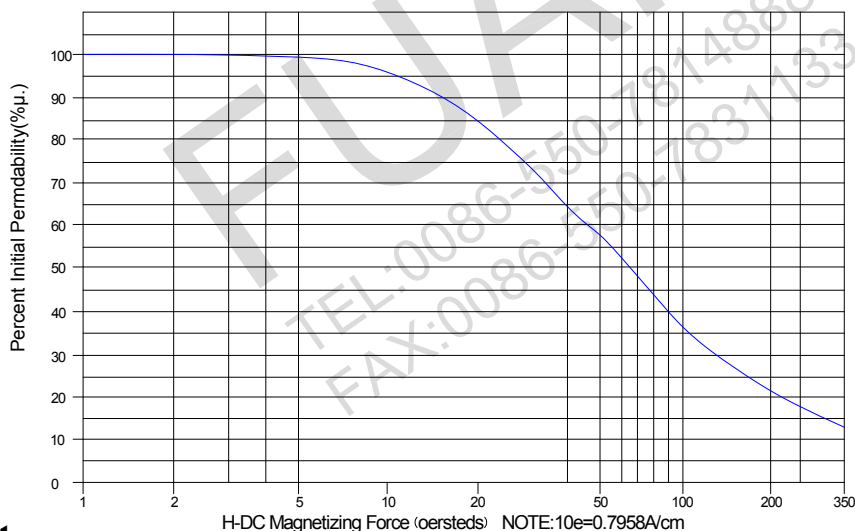

Note:

- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: ROHS compliant.