


Dimension: (UNIT:mm)

A	40.0 ± 0.8
B	13.3 ± 0.3
C	22.4 ± 0.3
D	15.4 ± 0.3
E	29.0Min
F	13.3 ± 0.3
G	
H	

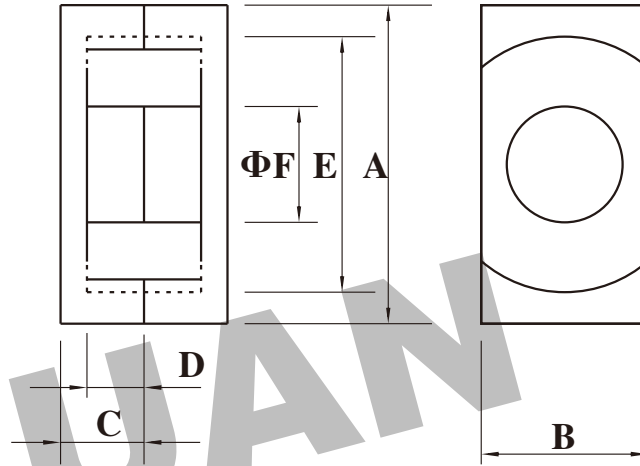


Test conditions

AL: F=1.0KHz U=0.3V N=10Ts

Effective parameter

C1(mm) ⁻¹	Ae(mm ²)	Le(mm)	Ve(mm ³)	Weight(g)
0.66	149	98.014602		≈41

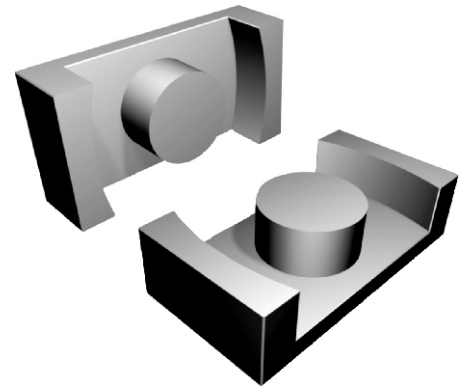

Core halves

Clamping force for Al measurements, 50+/-20N.
gapped cores are available on request.

Grade	AL (nH)	μe	AIR GAP μm	Type number
P3	3200 ± 25%	≈ 1900	≈ 0	EER40-P3
P4	3200 ± 25%	≈ 1900	≈ 0	EER 40-P4

Properties of core sets under power conditions

Grade	B (mT) at		Core loss (w) at	
	H=250 A/m F=25KHz T=100°C	F=25 KHz B=200mT T=100°C	f=100 KHz B=100mT T=100°C	F=100 KHz B=200mT T=100°C
P3	≥ 320	≤ 1.8	≤ 1.9	-
P4	≥ 320	-	≤ 1.45	≤ 8.7

Note:

- 1: Document is the property of FUAN Inc & is not allow to be duplicated without authorization
- 2: RoHS compliant.