



PAIRUI

FUAN

Ferrite Cores T36*23*15


P3 - T36*23*15 - C/P

P3 : Material .
 T36*23*15 : Core Size.
 C/P : Coating.
 C=Epoxy;P=Parylene.



Dimension: (UNIT:mm)

	Dimensions (mm)	Epoxy Coating Dimensions(mm)
OD	36.00 ± 0.50	37.20max
ID	23.00 ± 0.50	29.10min
HT	15.00 ± 0.40	16.00max

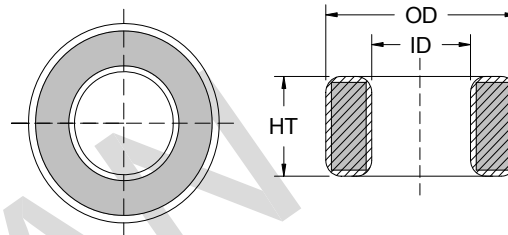

Effective parameter

Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g/set)
92.68	97.50	9036.01	≈ 43.37


Test conditions

AL: F=10.0KHz U=0.1V N=10Ts (HP-4284A) .
 Coating The core are coated with epoxy,
 flame retardant in accordance
 with "UL 94V-0"file number E228348.
 The colour is green.


Ring core data

AL(nH)	μi	Type Number
3041 ± 25%	2300	T36*23*15 - P3
6610 ± 30%	5000	T36*23*15 - H5K
9254 ± 30%	7000	T36*23*15 - H7K
13220 ± 30%	10000	T36*23*15 - H10K


Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

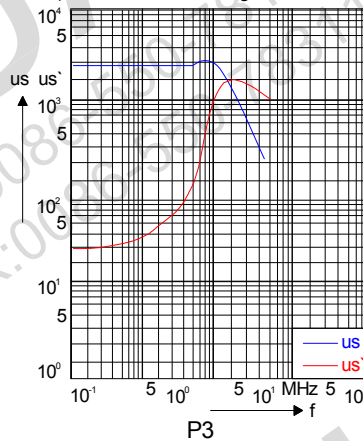


Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

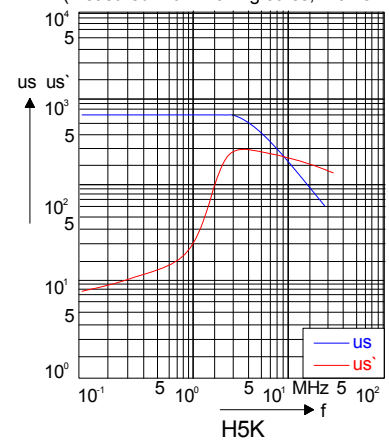

Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

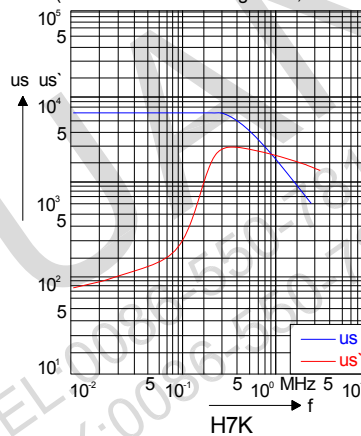

Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

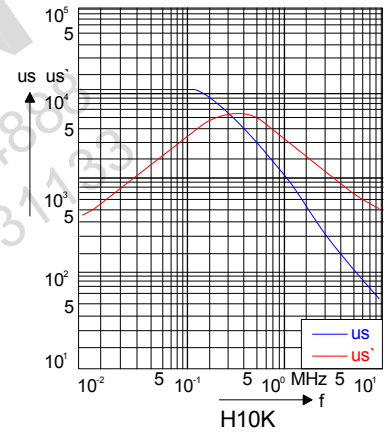

Note:

- 1:Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2:ROHS compliant.