



PAIRUI

FUAN

Ferrite Cores T60*38*20


P3 - T60*38*20 - C/P

P3 : Material .
T60*38*20 : Core Size.
C/P : Coating.
C=Epoxy;P=Parylene.



Dimension: (UNIT:mm)

	Dimensions (mm)	Epoxy Coating Dimensions(mm)
OD	60.00 ± 1.50	62.00max
ID	38.00 ± 1.00	36.00min
HT	20.00 ± 0.70	21.50max

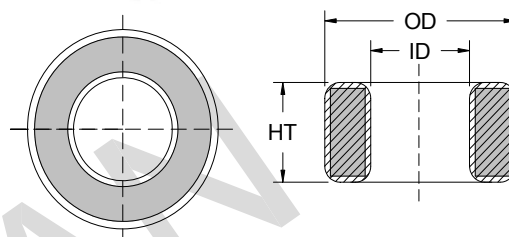

Effective parameter





Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g/set)
153.94	220.00	33866.37	≈ 162.56

Test conditions

AL: F=10.0KHz U=0.1V N=10Ts (HP-4284A) .
Coating The core are coated with epoxy,
flame retardant in accordance
with "UL 94V-0"file number E228348.
The colour is green.

Ring core data

AL(nH)	μi	Type Number
4131 ± 25%	2300	T60*38*20 - P3
8980 ± 30%	5000	T60*38*20 - H5K
12571 ± 30%	7000	T60*38*20 - H7K
17959 ± 30%	10000	T60*38*20 - H10K

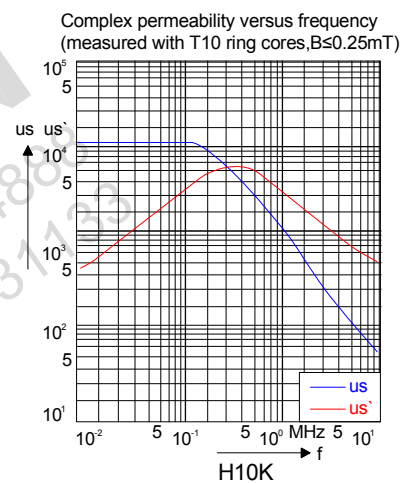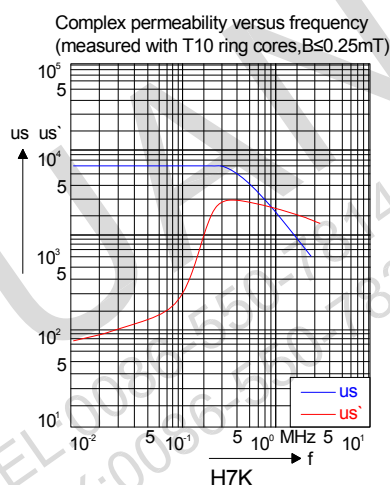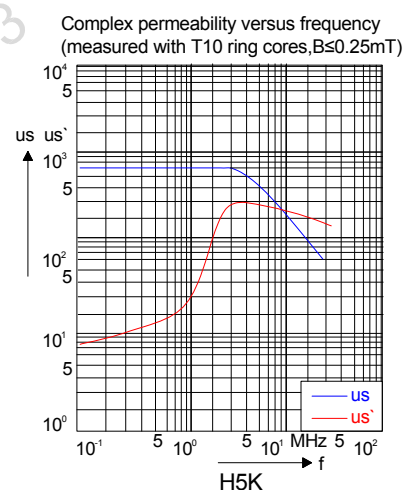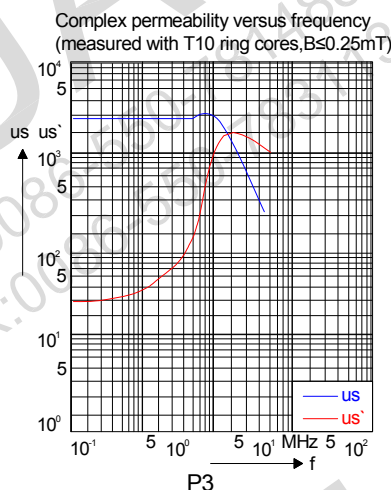

Note:

- 1:Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2:ROHS compliant.