



PAIRUI

FUAN

Ferrite Cores

T6*3*3


P3 - T6*3*3 - C/P

P3 : Material .
 T6*3*3 : Core Size.
 C/P : Coating.
 C=Epoxy;P=Parylene.



Dimension: (UNIT:mm)

	Dimensions (mm)	Epoxy Coating Dimensions(mm)
OD	6.0 ± 0.30	6.00±0.30
ID	3.0 ± 0.30	3.00±0.30
HT	3.0 ± 0.20	3.00±0.20

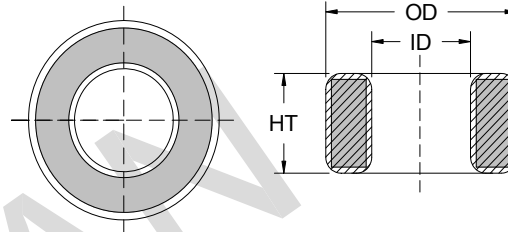

Effective parameter

Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g/set)
14.14	4.50	63.62	≈ 0.31


Test conditions

AL: F=10.0KHz U=0.1V N=10Ts (HP-4284A) .
 Coating The core are coated with epoxy, flame retardant in accordance with "UL 94V-0"file number E228348. The colour is green.


Ring core data

AL(nH)	μi	Type Number
920 ± 25%	2300	T6*3*3 - P3
2000 ± 30%	5000	T6*3*3 - H5K
2800 ± 30%	7000	T6*3*3 - H7K
4000 ± 30%	10000	T6*3*3 - H10K


Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

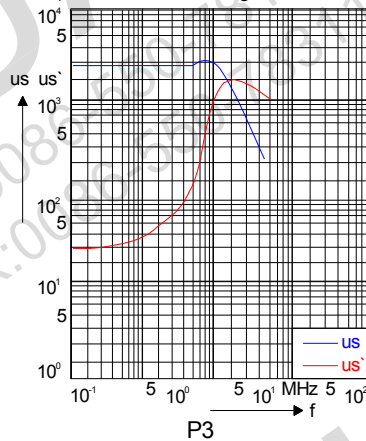


Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

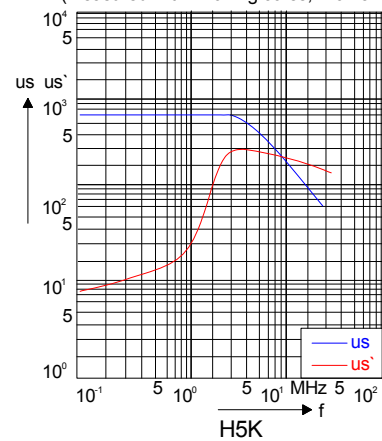

Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

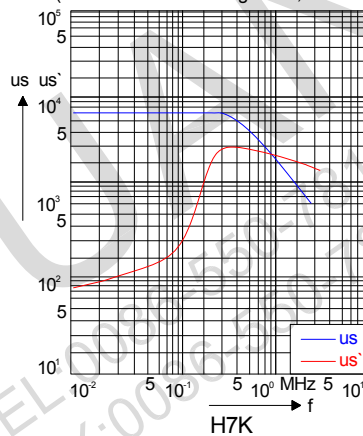

Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

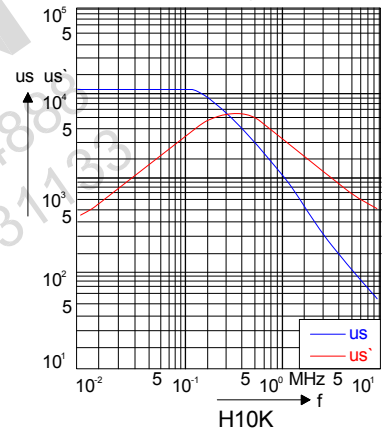

Note:

- 1:Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2:ROHS compliant.