
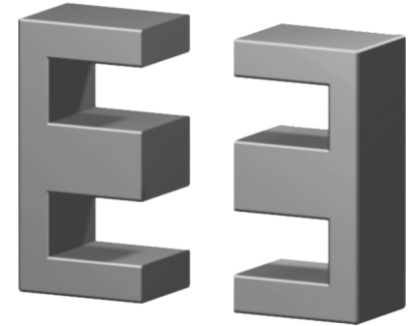


Dimension: (UNIT:mm)

A	43-1.7
B	21 ± 0.2
C	15.2-0.6
D	14.8+0.6
E	29.5Min
F	12.2-0.5
G	
H	

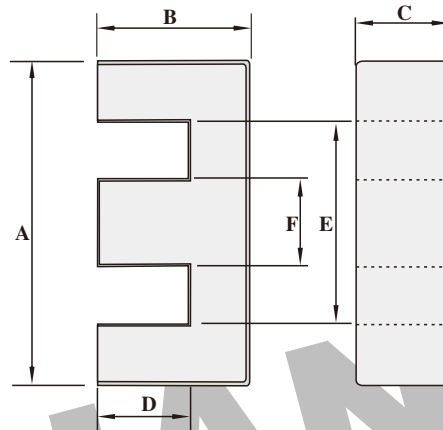

Test conditions

AL: F=1.0KHz U=0.3V N=10Ts

Effective parameter

C1(mm) ⁴	Ae(mm ²)	Le(mm)	Ve(mm ³)	Weight(g)
0.548	178	97.0	17300	≈44

Core halves

AL measured in combination with a non-gapped core half, clamping force for Al measurements, 40+/-20N unless otherwise stated.

Core halves of high permeability grades. Clamping force for Al measurements, 40+/-20N

Grade	AL (nH)	μe	AIR GAP μm	Type number
P3	100 ± 5%	≈ 43	≈ 3960	EE4215-P3
	160 ± 5%	≈ 69	≈ 2060	EE4215-P3
	250 ± 5%	≈ 108	≈ 1140	EE4215-P3
	315 ± 5%	≈ 137	≈ 850	EE4215-P3
	400 ± 8%	≈ 173	≈ 630	EE4215-P3
	630 ± 15%	≈ 273	≈ 360	EE4215-P3
	3950 ± 25%	≈ 1710	≈ 0	EE4215-P3
P4	4100 ± 25%	≈ 1780	≈ 0	EE4215-P4
HQ2K	100 ± 5%	≈ 43	≈ 3960	EE4215-HQ2K
	160 ± 5%	≈ 69	≈ 2060	EE4215-HQ2K
	250 ± 5%	≈ 108	≈ 1140	EE4215-HQ2K
	315 ± 5%	≈ 137	≈ 850	EE4215-HQ2K
	400 ± 8%	≈ 173	≈ 630	EE4215-HQ2K
	630 ± 15%	≈ 273	≈ 360	EE4215-HQ2K
	3600 ± 25%	≈ 1560	≈ 0	EE4215-HQ2K

Grade	AL (nH)	μe	AIR GAP μm	Type number
H7K	8000 ± 25%	≈ 3470	≈ 0	EE4215-H7K

Properties of core sets under power conditions

Grade	B (mT) at	Core loss (w) at			
	H=250 A/m F=25KHz T=100 °C	F=25 KHz B=200mT T=100 °C	f=100 KHz B=100mT T=100 °C	F=100 KHz B=200mT T=100 °C	F=400 KHz B=50mT T=100 °C
P3	≥ 320	≤ 1.9	≤ 2.2	-	-
P4	≥ 320	-	≤ 1.7	≤ 8.8	-
HQ2K	≥ 320	-	≤ 2.2	-	≤ 3.8

Note:

- 1: Document is the property of FUAN Inc & is not allow to be duplicated without authorization
- 2: RoHS compliant.