

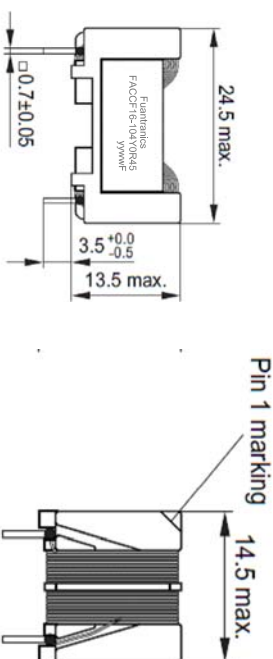


P/N: FACCF16-104Y0R45

Mechanical Dimensions : (mm)

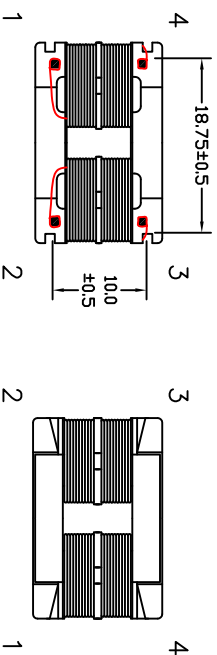

Coil structure and schematic



Bobbin: UT-1601/PM9820.

core: UT16-H5K

wire: ZUEW-B/130C.

Epoxy: E-500

Varnish: TYPE NO.:T4260GK

Weight: Approx 8.0g/p.c.

Note : Temp 20℃ 48% RH. RoHS compliant.

PROPRIETARY Document is the property of FUAN Inc & is not allow to be duplicated without authorization

Date	Rev.	Revisions Rec.

Electrical Specifications:

Inductance : at 10KHz 0.1V

L1-2&4-3= 100mH +50%/-30% @10KHz 0.1V


Lk1-2&4-3= 1930uH typ

Rated current: 0.45A.

D.C.Resistance: 1-2&4-3= 2.93 Ohm typ

Trans Ratio: 1 : 1 ±2%

Hi-Pot : Coil-Coil 1500VAC/1mA/2Second

 <p>TEL: +86-550-7814888 Fax: +86-550-7831133 www.fuantronics.com</p>	<p>Model: UT16 common choke (Current-compensated frame core double chokes)</p>		<p>Document No: 1209017</p>
	<p>Unless Otherwise Specified TOLERANCES: X : ±0.50 .XX : ±0.25 Dimensions in mm</p>		<p>Rev.: 00</p>

DW/N.	Yuingyu	DATE:
CHK.	Anson.zhan	Sep./20/2012
APP.	Louis.Lin	Page No.: 1 OF 1