



PAIRUI

FUAN

Ferrite Cores T40*24*16


P3 - T40*24*16 - C/P

P3 : Material .
 T40*24*16 : Core Size.
 C/P : Coating.
 C=Epoxy;P=Parylene.



Dimension: (UNIT:mm)

	Dimensions (mm)	Epoxy Coating Dimensions(mm)
OD	40.00 ± 0.50	41.40max
ID	24.00 ± 0.50	23.00min
HT	16.00 ± 0.40	17.10max

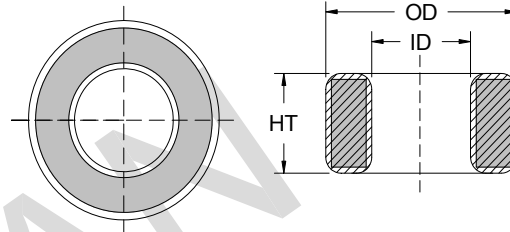

Effective parameter

Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g/set)
100.53	128.00	12867.96	≈ 61.77


Test conditions

AL: F=10.0KHz U=0.1V N=10Ts (HP-4284A) .
 Coating The core are coated with epoxy,
 flame retardant in accordance
 with "UL 94V-0"file number E228348.
 The colour is green.


Ring core data

AL(nH)	μi	Type Number
3680 ± 25%	2300	T40*24*16 - P3
8000 ± 30%	5000	T40*24*16 - H5K
11200 ± 30%	7000	T40*24*16 - H7K
16000 ± 30%	10000	T40*24*16 - H10K


Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

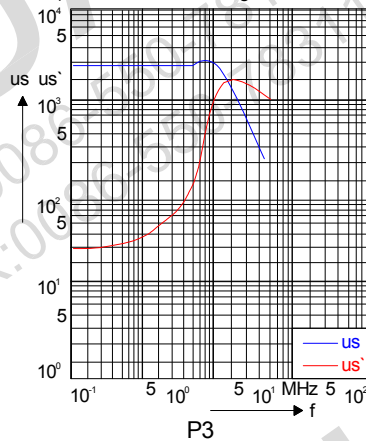


Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

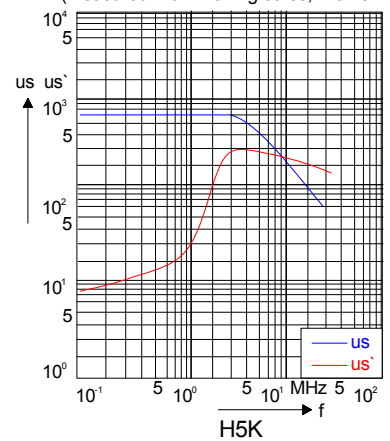

Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

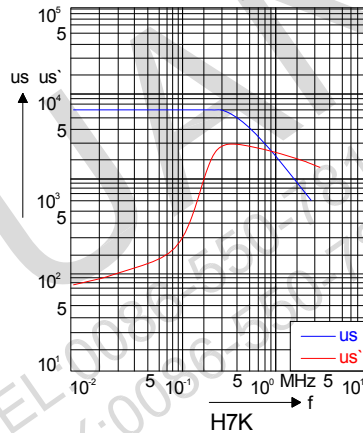

Complex permeability versus frequency (measured with T10 ring cores, B≤0.25mT)

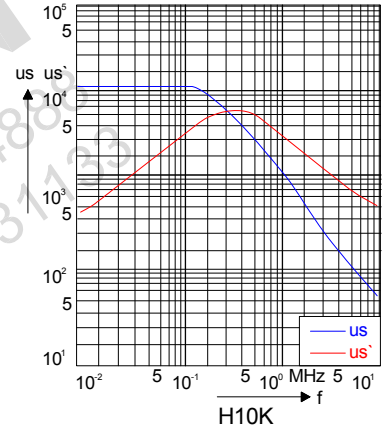

Note:

- 1:Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2:ROHS compliant.